

LED POWER SUPPLY DATASHEET



SP150-24VLT

DESCRIPTION

SP150 is triac dimmable and constant voltage product, with high cost performance, Open circuit, short circuit, overload and over heat protection, Built-in active PFC function. Compliance to safety and EMC certification, Lifetime more than 30,000hrs.

Input

Items	Conditions	Request	Note
Input voltage	Ta	220-240Vac	198-255VAC
Input frequency		50Hz	--
Input current	25℃, rated input voltage, output with max. rated power	< 1A	--
Input power		<166W	--
Efficiency		90%	full load
Inrush current	25℃, rated input voltage	<75A	Peak
PF	25℃, rated input voltage, output with max. rated power	≥0.9	full load
It's necessary to add a switch between electricity and Led power to reach the latest ErP regulations			

Temperature and others

Items	Conditions	Request	Note
Operation temp.	--	-20-45℃	--
Relative humidity	--	45%-85%	--
Max. case temp.	--	90℃	
Lifetime	Max.Ta, rated input voltage, output with max. rated power	30,000hr	--
Working noise	25℃, rated input voltage, output with rated power, mute box background noise <30dB, pickup 10cm distance from products	<35dB	--

Protection

Items	Conditions	Request	Note
Open circuit	Ta, rated input voltage, no load	--	--
Over load	Ta, 0.94-1.06 times of input voltage, 1.8 times of output rated power	Yes	--
Short circuit	Ta, 0.94-1.06 times of input voltage	Yes	--
Over temperature	Ta, 0.94-1.06 times of input voltage, temperature detected pointed more than 110 degree	Yes	--
Output over voltage	Ta, 0.94-1.06 times of input voltage, output voltage is 1.5 times of rated one	Yes	--
Auto recovery	Overload, Short circuit, over heat revocation	Yes	--
Latch off	over heat re-start after cut off	--	--

Output

Items	Conditions	Request	Note
Startup time	25℃, rated input voltage, output with max. rated power	--	@230V
Output voltage and precision	Ta, rated input voltage, output with rated power	24V±5%	<25V
Output current range	Ta, rated input voltage	2-6.25A	48-150W
Output voltage wave	25℃, rated input voltage, output with max. rated power	<500mV	Vp-p
Output overload	25℃, rated input voltage, output with 2 times LED load	yes	--
Output current and precision	Ta, rated input voltage, output with rated power	--	--
Rated output voltage range	Ta, rated input voltage	--	--
Output current wave	25℃, rated input voltage, output with max. rated power	--	Ip-p
Dimming mode	leading or trailing edge dimmers	TRIAC	--
Dimming range	--	10%-100%	@230V

Mechanical, mounting and wiring mode

Items	Conditions
Case material and size	Plastic
Mounting ways	Independent
Insulation type	Class II
IP grade	IP20
Input cables dimension	connector+ H05VVH2-F 2x1.0mm²
Output cables dimension	connector+ H05VVH2-F 2x1.0mm² x2
Output cables length	

Standard



Items	Conditions
Safety	IEC61347-1, IEC61347-2-13 (with lamps IEC60598)
Harmonic	IEC61000-3-2
EMI	IEC55015
EMS	IEC61547

Dimensions(mm)



SNAPPY

KNOW HOW. NO LIMITS.

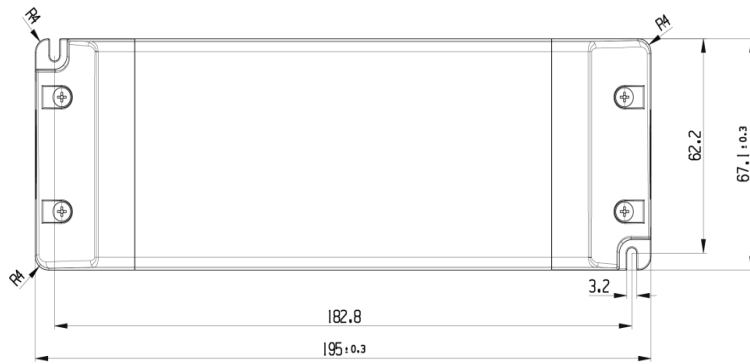

Wiring Diagram

L — ○
N — ○

PRI

LED POWER SUPPLY

Wire preparation

7-8mm

+ ○
+ ○
SEC
- ○
- ○

